


LUBRITEX ISO A PLUS 32

KNITTING MACHINE LUBRICANT

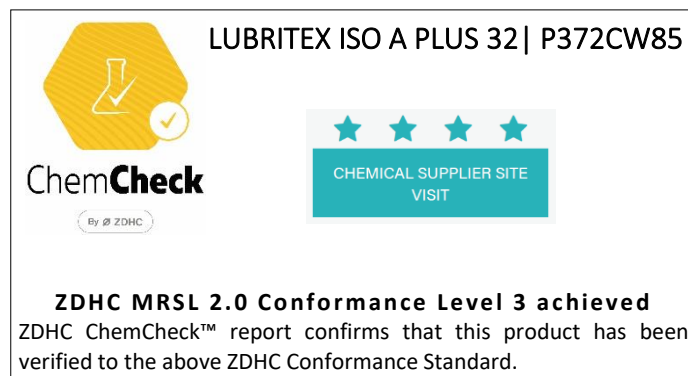

GENERAL PROPERTIES :

LUBRITEX ISO A PLUS 32 knitting machine oils with high performance lubrication and washable characteristics are produced to use for either circular knitting machines or flat knitting machines.

Viscosity, (40 °C)	Density, (20°C, g/ml)	Lubrication Performance	Washability	Machine Fein
32 cSt.	0.87	excellent	very good	18-28

CONTENT	: A synergetic combination of highly purified mineral and synthetic oils, emulsifiers and special additives.
pH (5 % solution)	: Neutral
APPEARANCE	: Yellowish, clear liquid.
FLASH POINT	: > 200°C (COC)
EMULSION	: Stable milky
SURFACE TENSION	: 20-40 dyn/cm.
ADDITIVES	: AW (Antiwear), EP (Extreme Pressure), Antirust, Antioxidant, Antimicrobial, VIP, pH regulator, PPD and emulsifiers.
CORROSION AND RUST RESISTANCE	: Excellent (1a)
FRICTION and WEAR PREVENTION PROPERTIES	: Excellent > 1000 Newton

APPLICATIONS :

LUBRITEX ISO A PLUS 32 knitting machine oils are carried out by means of either automatic lubricators or manually. The oil amount is adjusted according to the machine rpm.

RECOMMENDATION :

- The lubricant at the suitable viscosity according to the machine fein is used as the above table, if there is not any opposite recommendation by the machine manufacturer or the **Promar technicians**.
- The oil amount in accordance with the machine rpm should be used for the productivity and the profit.
- The residual parts of fiber tightened in the splits of machines should be cleaned periodically (esp. once a week) with our special cleansing oil named.

PACKAGING : In 200 lt steel barrels or 1000 lt IBC container.

STORAGE : It is recommended to store in a dry place for the long period.

PROMAR Technical Department is ready to solve your technical problems. Our technical advice and recommendations given verbally, in writing or by trials are believed to be correct. We cannot accept any responsibility for application and processing methods which are beyond our control.
BR.492.00 Pub Date: 15.10.2020



Promar Endüstriyel Kimyasallar San. ve Dış Tic. A.Ş.
İkitelli OSB. Galvano Teknik F:2-4 34490 Başakşehir - İstanbul
T : +90 212 671 05 10 pbx F : +90 212 671 05 70
promar@promarchemicals.com

